

CONTACT US

Address : Group23,Mabei Village,Matang
Town,Rudong County,Nantong,Jiangsu,
China(Mainland)

Website : www.jhbakeryequipment.com



PRODUCT MANUALS

EXCELLENCE/FOCUS/LEADERSHIP/FUTURE



BAKERY EQUIPMENT

FRESH MILK MIXER



multi-position speed control switch



Model	Power (w)	Voltage (v)	Frequency (Hz)	Volume (l)	Speed (R/min)	Flour (kg)	Net weight (kg)	Dimension (mm)
B7	300	220	50	7	115/650	0.5	19	390*225*420

FOOD MIXER



B10



B15



B20



B30

Model	Power (w)	Voltage (v)	Frequency (Hz)	Volume (l)	Speed (R/min)	Flour (kg)	Net weight (kg)	Dimension (mm)
B10	370	220	50	10	170/340	1	41	490*390*695
B15	300	220	50	15	170/340	1.5	42	490*390*720
B20	1100	220/380	50	20	105/180/425	2~4	55	530*435*820
B30	1500	220/380	50	25	68/170/350	3~6	63	530*435*820

FOOD MIXER



3 KINDS OF ACCESSORIES



Model	Power (w)	Voltage (v)	Frequency (hz)	Volume (l)	Speed (r/min)	Flour (kg)	Net weight (kg)	Dimension (mm)
B40	2000	220/380	50	40	65/102/296	6~8	135	730*640*1130
B50	2200	380	50	50	74/141/277	8~10	283	840*700*1440
B60	3000	380	50	60	77/148/290	8~10	311	840*700*1440

DOUGH MIXER



SH20



SH30



SH40



SH50



SH60


Model	Power (w)	Voltage (v)	Frequency (hz)	Bowl speed (r/min)	Hook speed (r/min)	Flour (kg)	Net weight (kg)	Dimension (mm)
SH20	1100	220/380	50	13/26	132/264	8	89	700*380*785
SH30	1500	220/380	50	12.5/25	123/246	12	107	745*430*850
SH40	1900	220/380	50	12.5/25	123/246	15	108	770*440*850
SH50	2400	380	50	12.5/25	123/246	20	173	920*540*1300
SH60	2400	380	50	12.5/25	123/246	25	177	930*550*1300

STANDARD ELECTRIC OVEN

Positive stainless steel material, double layer of high temperature resistant tempered glass perspective window, knowledge of product as any time during baking bake effect.

Adopted far infrared radiation heating, electric heating tube heat uniform distribution.

Independent control upper and lower temperature in the furnace, digital display temperature control system.

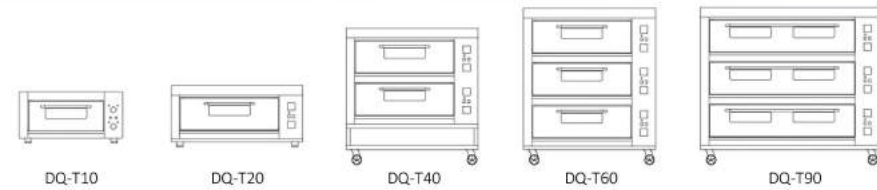

DQ-T10



DQ-T20



DQ-T90



DQ-T40



DQ-T60

Model	Voltage (V)	Heater Power (Kw)	Internal dimensions (mm)	Net weight (kg)	Dimension (mm)
DQ-T10	220	3.4	650*450*200	45	960*575*460
DQ-T20	220/380	6.6	870*695*220	78	1230*840*565
DQ-T40	380	13.2	870*695*220	155	1230*840*1270
DQ-T60	380	19.8	870*695*220	180	1230*840*1450
DQ-T90	380	24	1300*695*220	248	1662*840*1465

STANDARD GAS OVEN

Positive stainless steel material, double layer of high temperature resistant tempered glass perspective window, knowledge of product at any time during baking bake effect.

Top fire and bottom control independently, independent burner, operate freely.

The microcomputer control pulse ignition and flame detection system, the ignition frequency is high, the accidental stall or gas in the stall will automatically alarm, safe & convenient.

Using liquefied petroleum gas, burning high thermal efficiency.



DQ-A10L



DQ-A20L



DQ-A40L



DQ-A60L

Model	Voltage (V)	Heater Power (Kw)	Internal dimensions (mm)	Net weight (Kg)	Dimension (mm)
DQ-A10L	220	0.1	630*565*230	63	1060*740*590
DQ-A20L	220	0.1	870*665*230	88	1300*840*590
DQ-A40L	220	0.2	870*665*230	175	1300*840*1400
DQ-A60L	220	0.3	870*665*230	238	1300*840*1680

LUXURIOUS ELECTRIC OVEN

Positive stainless steel material, double layer of high temperature resistant tempered glass perspective window, knowledge of product at any time during baking bake effect.

Adopted far infrared radiation heating,electric heating tube heat uniform distribution.

Independent control upper and lower temperature in the furnace,digital display temperature control system.

Up and down heating tube to each have nine,equipped with insulated net top fire,uniform heat distribution comprehensively.



DQ-T20H



DQ-T40H



DQ-T60H



DQ-T90H

Model	Voltage (V)	Heater Power (Kw)	Internal dimensions (mm)	Net weight (kg)	Dimension (mm)
DQ-T20H	220/380	6.6	870*695*220	85	1300*840*590
DQ-T40H	380	14	870*695*220	155	1300*840*1335
DQ-T60H	380	21	870*695*220	220	1300*840*1545
DQ-T90H	380	24	1300*695*220	285	1733*840*1500

LUXURIOUS GAS OVEN

Positive stainless steel material, double layer of high temperature resistant tempered glass perspective window, knowledge of product at any time during baking bake effect.

Top fire and bottom control independently, independent burner, operate freely.

The microcomputer control pulse ignition and flame detection system, the ignition frequency is high, the accidental stall or gas in the stall will automatically alarm, safe & convenient.

Using liquefied petroleum gas, natural gas, pipeline gas as a fuel, burning high thermal efficiency, gas conversion convenient no other change device.



DQ-A20Q



DQ-A40Q



DQ-A60Q



DQ-A90Q

Model	Voltage (V)	Heater Power (Kw)	Internal dimensions (mm)	Net weight (kg)	Dimension (mm)
DQ-A20Q	220	0.1	910*715*230	93	1390*900*650
DQ-A40Q	220	0.2	910*715*230	192	1390*900*1460
DQ-A60Q	220	0.3	910*715*230	266	1390*900*1750
DQ-A90Q	220	0.3	1330*715*230	357	1810*900*1740

BAKING AND FERMENTATION CONJOINED OVEN

The best combination of baking and fermentation, baking covering the vast products, better suited to store freshly baked.

The overall design beautiful generous, front full stainless steel material, durable.

Baking part can choose electric type or gas type, according to actual situation.



Model	Voltage (v)	Power (kw)	Spec.(Baking) (tray)	Spec.(Ferm) (tray)	Dimension (mm)
DQ-T40/8F	380	1.7	4	8	1300*840*1730

ELECTRIC CONVECTION OVEN

The shell is made of stainless steel material, beautiful and durable, through the glass door is more readily understand the status of the baking.

The configuration in the furnace fan forced hot air circulation, uniform heat distribution comprehensively, to ensure the quality of baking and unified.

The automatic spray steam, functions such as automatic temperature control limit temperature, make application more convenient save worry.

Size of air volume can be adjusted in the furnace, equipped with lighting.



Model	Voltage (v)	Power (kw)	Temperature Range (°C)	Dimension (mm)
DQ-FC5E	380	9	room temperature~400	900*1100*900
DQ-FC10E	380	18	room temperature~400	900*1100*1460

GAS CONVECTION OVEN

The shell is made of stainless steel material, beautiful and durable, through the glass door is more readily understand the status of the baking.

The configuration in the furnace fan forced hot air circulation, uniform heat distribution comprehensively, to ensure the quality of baking and unified.

The automatic spray steam, functions such as automatic temperature control limit temperature, make application more convenient save worry.

Size of air volume can be adjusted in the furnace, equipped with lighting.



DQ-FC5G

DQ-FC10G

Model	Voltage (v)	Power (kw)	Temperature Range (°C)	Dimension (mm)
DQ-FC5G	220	0.4	room temperature~400	900*1195*900
DQ-FC10G	220	0.8	room temperature~400	900*1195*1460

PROOFER REFRIGERATED



DQ-DF18

DQ-XF-1R

Model	DQ-DF18	DQ-XF-1R
Type control	Intelligent electronic temperature control	Intelligent electronic temperature control
Validity capacity	650L	Trolley(660*820*178)
Frequency	50Hz	50Hz
Voltage	220V	220V
Power	1.5Kw	3Kw
Temperature range	/	+38°C ~ 50°C/99%RH
Temperature (freezing)	-10~-15°C /99%RH (second stage fermentation)	/
Temperature (refrigeration)	-1~-5°C /99%RH (a fermentation)	/
Dimensions	600*960*2150mm	900*1260*2250mm

LUXURIOUS FERMENTATION TANK



DQ-X15A

DQ-X30A

Model	Voltage (v)	Power (kw)	Specification (disc)	Dimension (mm)
DQ-X15A	220	2.6	15	600*840*2040
DQ-X30A	220	3.2	30	1200*840*2040

STANDARD BREAD PROOFERS



DQ-X16B

DQ-X32B

Model	Voltage (v)	Power (kw)	Specification (disc)	Dimension (mm)
DQ-X16B	220	2.6	16	490*730*1915
DQ-X32B	220	3.2	32	990*730*1915

BREAD SLICER & PIE PLATE HOLDER




SH31

15 Floors Pie Plate Holder

Model	Output (pcs)	Thickness (mm)	Voltage (v)	Power (Kw)	Frequency (Hz)	Weight (Kg)	Dimension (mm)
SH31	31	12	220	0.37	50	73	646*680*680
SH36	36	10	220	0.37	50	73	646*680*680
SH44	44	8	220	0.37	50	73	646*680*680



TABLE TOP DOUGH SHEETER

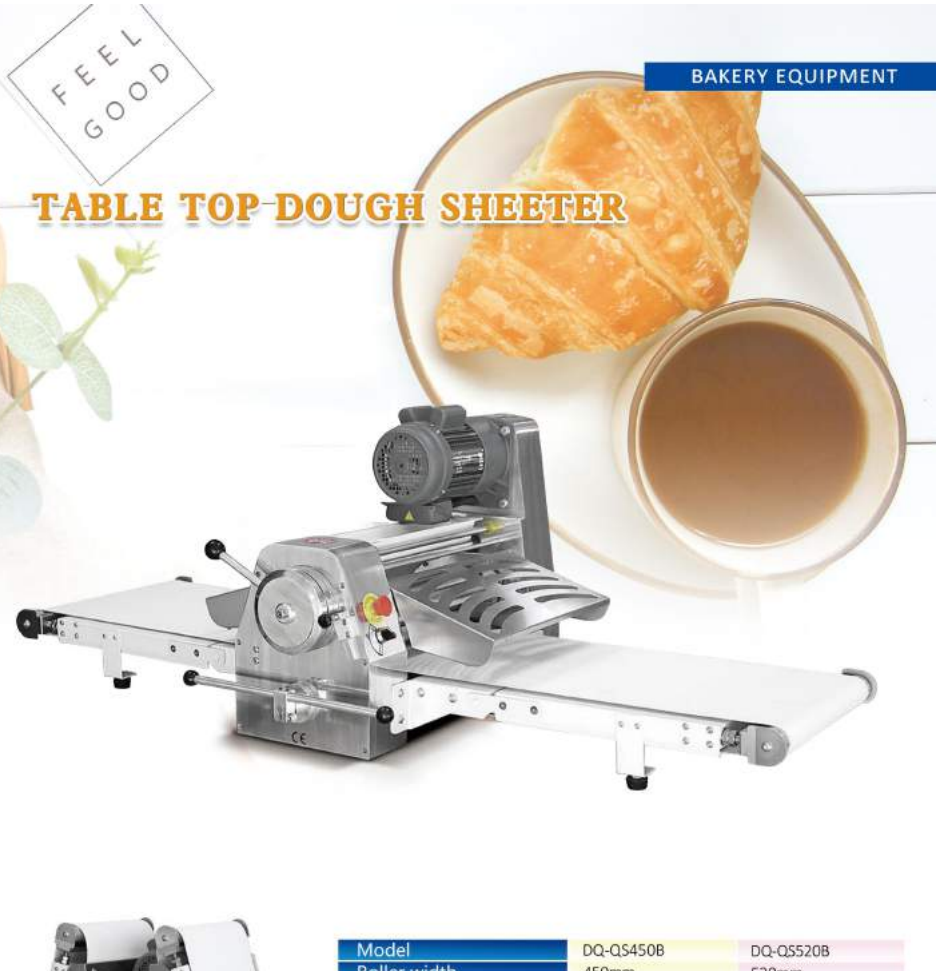

Model	DQ-QS450B	DQ-QS520B
Roller width	450mm	520mm
Roller regulating range	0.5-38mm	0.5-38mm
Max.dough weight	4kg	5kg
Voltage	220V/380V	220V/380V
Power	0.55Kw	0.55Kw
Conveyor belt size	1700*430mm	2160*500mm
Weight	120kg	159kg
Dimensions	1770*810*640mm	2230*880*640mm

AUTOMATIC DOUGH SHEETER



Model	DQ-QS650Z
Roller width	650mm
Roller regulating range	0.5-38mm
Max.dough weight	6.5kg
Voltage	220V/380V
Power	1.5Kw
Conveyor belt size	3000*630mm
Weight	335kg
Dimensions	3760*1100*1370mm



VERTICAL DOUGH SHEETER



Model	DQ-QS380C	DQ-QS520C	DQ-QS650C	DQ-QS520E
Roller width	380mm	520mm	650mm	520mm
Roller regulating range	0.5-38mm	0.5-38mm	0.5-38mm	0.5-38mm
Max.dough weight	3kg	5kg	6.5kg	5kg
Voltage	220V/380V	220V/380V	220V/380V	220V/380V
Power	0.55Kw	0.55Kw	0.75Kw	0.55Kw
Conveyor belt size	1700*360mm	2160*500mm	2400*630mm	2160*500mm
Weight	170kg	190kg	230kg	190kg
Dimensions	2100*810*1050mm	2560*950*1062mm	2815*1100*1065mm	2740*950*1050mm

FULL-AUTOMATIC DOUGH DIVIDER ROUNDER

Model	DQ-K30G
Capacity	30pcs/time
Dough weight range	30-100g/pcs
Voltage	220V/380V
Power	1.5Kw
Weight	560Kg
Dimensions	590*450*1600mm



SEMI-AUTOMATIC DOUGH DIVIDER ROUNDER

Model	DQ-K30S
Capacity	30pcs/time
Dough weight range	30-100g/pcs
Voltage	220V/380V
Power	0.75Kw
Weight	365Kg
Dimensions	740*570*2100mm



MANUAL DIVIDER

ELECTRIC DIVIDER



DQ-K36



DQ-K36

Model	DQ-K36	DQ-K36A
Dough weight range	30-140g/pcs	30-140g/pcs
Voltage	220V/380V	/
Power	0.5Kw	/
Weight	180Kg	70Kg
Dimensions	550*430*1200mm	530*455*1605mm

**BAGUETTE
MOULDER**



Model	DQ-Z750
Specification	Belt width:730mm
Dough weight range	50-1200g/pcs
Voltage	220V/380V
Power	0.75Kw
Weight	284Kg
Dimensions	1000*970*1600mm

BONE SAW SERIES

BONE SAW SERIES



■ DQ -W210CA/W280CA
(Steel plate painting)

■ DQ -W210A/W280A
(Stainless steel)

■ DQ -W210D (Aluminum material)

■ DQ -W210A1 (W210CA upgrade)
■ DQ -W218A1 (W218CA upgrade)

Model	Power (kw)	Voltage (v)	Frequency (Hz)	Wheel diameter (mm)	Length of saw blade (mm)	Band saw's speed (m/s)	Commodity Height/Width (mm)	Table size (mm)	N.W. (kg)	Dimension (mm)
DQ-W210CA	1.1	110/220/230/380	50/60	210	1650	15	225/192	500*400	46	565*505*910
DQ-W218CA	1.1	110/220/230/380	50/60	210	1830	15	315/192	500*400	48	565*505*1000
DQ-W210A	1.1	110/220/230/380	50/60	210	1650	15	225/189	600*415	52	620*505*945
DQ-W218A	1.1	110/220/230/380	50/60	210	1830	15	315/189	600*415	57	620*505*1035

Model	Power (kw)	Voltage (v)	Frequency (Hz)	Wheel diameter (mm)	Length of saw blade (mm)	Band saw's speed (m/s)	Commodity Height/Width (mm)	Table size (mm)	N.W. (kg)	Dimension (mm)
DQ-W210A1	1.1	110/220/230/380	50/60	210	1650	15	239/195	500*402	48	540*490*910
DQ-W218A1	1.1	110/220/230/380	50/60	210	1830	15	329/195	500*402	48	540*490*1000
DQ-W210D	1.1	110/220/230/380	50/60	210	1650	15	290/190	520*370	33	560*460*900

BONE SAW SERIES

BONE SAW SERIES



Standard Attachment: 1 pc Saw Blade

■ DQ-W310D

■ DQ-W310CA
(Steel plate painting)

■ DQ-W310A
(Stainless steel)

Model	Power (kw)	Voltage (v)	Frequency (hz)	Wheel diameter (mm)	Length of saw blade (mm)	Band saw's speed (m/s)	Commodity Height/Width (mm)	Table size (mm)	N.W. (kg)	Dimension (mm)
DQ-W310D	1.5	110/220/230/380	50/60	260	2218	19	345/220	680*480	82	680*610*1100

Model	Power (kw)	Voltage (v)	Frequency (hz)	Wheel diameter (mm)	Length of saw blade (mm)	Band saw's speed (m/s)	Commodity Height/Width (mm)	Table size (mm)	N.W. (kg)	Dimension (mm)
DQ-W310CA	1.5	110/220/230/380	50/60	260	2218	15	380/250	700*550	87	740*695*1545
DQ-W310A	1.5	110/220/230/380	50/60	260	2218	15	380/250	700*550	95	805*695*1605

BONE SAW SERIES

MEAT GRINDER SERIES



304 stainless steel



Anti-fingerprint



Precise tick marks

■ DQ DL-210

DQ-22AWL

DQ-22ACL

DQ-32AWL

Model	Power (kw)	Voltage (v)	Frequency (Hz)	Wheel diameter (mm)	Band saw's speed (m/s)	Cutting thickness (mm)	Table size (mm)	N.W. (kg)	Dimension (mm)
DQDL-210	1.1	110/220/240	50/60	210	15/19	4-180	365*405	33.5	490*490*925

Model	Power (kw)	Voltage (v)	Frequency (Hz)	Product capacity (kg/h)	Speed (m/s)	Material of machine head	Material of machine shell	N.W. (kg)	Dimension (mm)
DQ-22AWL	1.1	220	50	250	170	stainless steel	stainless steel	24.5	490*370*460
DQ-22ACL	1.1	220	50	250	170	stainless steel	stainless steel	27.5	490*340*435
DQ-32AWL	2.2	110/220	50/60	350	170	stainless steel	stainless steel	44	560*410*505

MEAT GRINDER SERIES



DQ-22BG



DQ-22QG



DQ-12BG



DQ-12QG

Model	Power (kw)	Voltage (v)	Frequency (Hz)	Product capacity (kg/h)	Speed (m/s)	Material of machine head	Material of machine shell	N.W. (kg)	Dimension (mm)
DQ-22BG	1.1	110/220	50/60	150	170	Iron plating	stainless steel	23.5	430*290*400
DQ-22QG	1.1	110/220	50/60	150	170	stainless steel	stainless steel	24	430*290*400
DQ-12BG	0.85	110/220	50/60	120	170	Iron plating	stainless steel	20	370*220*420
DQ-12QG	0.85	110/220	50/60	120	170	stainless steel	stainless steel	21	370*220*420

MEAT GRINDER SERIES



DQ-8BG



DQ-8QG

Model	Power (kw)	Voltage (v)	Frequency (Hz)	Product capacity (kg/h)	Speed (m/s)	Material of machine head	Material of machine shell	N.W. (kg)	Dimension (mm)
DQ-8BG	0.45	220	50	60	170	Iron plating	stainless steel	10	300*170*330
DQ-8QG	0.45	220	50	60	170	stainless steel	stainless steel	10	300*170*330

MEAT SLICER SERIES



Model	Power (kw)	Voltage (v)	Frequency (Hz)	Slicer thickness (mm)	Width (mm)	Blade diameter (mm)	N.W. (kg)	Dimension (mm)
DQ-220AQP	0.12	110/220	50/60	0-12	160	220	15.5	575*465*415
DQ-250AQP	0.15	110/220	50/60	0-15	180	250	16	575*465*415
DQ-300AQP	0.25	110/220	50/60	0-16	220	300	23	615*525*510

VERTICAL SAUSAGE STUFFER



Model	Capacity (L)	N.W. (kg)	Dimension (mm)
TV10/A	10	33	770*430*330
TV15/A	15	36	890*430*330
TV20/A	20	46	880*460*360
TV25/A	25	49	990*460*360
TV30/A	30	51	1100*460*360

POTATO PEELER SERIES



■ DQ-X10C/X15C/X30C

■ DQ-X6D/X10D/X15D

Model	Power (kw)	Voltage (v)	Frequency (Hz)	Efficiency (kg/h)	Capacity (l)	N.W. (kg)	Dimension (mm)
DQ-X10C	0.55	110/220/230	50/60	240-480	10	42	460*460*785
DQ-X15C	0.75	110/220/230	50/60	480-900	15	53	520*520*850
DQ-X30C	1.5	110/220/230/380	50/60	1080-2160	30	72	600*580*1020
DQ-X6D	0.37	110/220/230	50/60	100-240	6	30	635*360*880
DQ-X10D	0.55	110/220/230	50/60	240-480	10	50	685*410*960
DQ-X15D	0.75	110/220/230	50/60	480-900	15	62	715*440*1030

MULTIFUNCTIONAL CUTTER SERIES



■ DQ-QS9E/QS12E

■ DQ-QS3A/QS5A/QS8A/QS13A



Chili

Garlic

Ginger

Meat

Model	Power (kw)	Voltage (v)	Frequency (Hz)	Blade Speed (r/min)	Capacity (l)	N.W. (kg)	Dimension (mm)
DQ-QS9E	1.1	110/220/230	50/60	1000-2200	9	20	485*350*350
DQ-QS12E	1.5	110/220/230	50/60	1000-2200	12	22	520*380*400
DQ-QS3A	0.75	110/220/230	50/60	1400-2900	3	22	320*310*555
DQ-QS5A	1.1	110/220/230	50/60	1400-2900	5	29	370*350*630
DQ-QS8A	1.5	110/220/230	50/60	1400-2900	8	38	380*400*735
DQ-QS13A	2.2	220/230/380	50/60	1400-2900	13	55	420*415*820

SUGARCANE MACHINE SERIES

SUGARCANE MACHINE SERIES



■ Sugar Cane Juice Extractor
DQ-HD250

■ Sugar Cane Juice Extractor With Knife
DQ-HD250LD

■ DQYS-T80A/DQYS-T80C

Model	Width of roller (mm)	Dia.of roller (mm)	N.W. (kg)	Dimension (mm)
DQ-HD250	100	76	34	470*360*370



■ Battery Sugarcane Juice Extractor
DQ-HD300TD



■ Electric sugar cane juicie machine
DQ-HDL100

Model	Power (kw)	Voltage (v)	Frequency (Hz)	Battery Supply Power (v)	Capacity (kg/h)	N.W. (kg)	Dimension (mm)
DQ-HD300TD	/	220	50	24	300	58	440*370*630



■ DQYS-L80

Model	Power (kw)	Voltage (v)	N.W. (kg)	Dimension (mm)	Remark
DQYS-T80A	0.35	DC24	51	340*320*600	Plug directly into power
DQYS-T80C	0.35	DC24/AC220	52	340*320*600	Plug directly into power/Plug directly into power
DQYS-L80	0.35	AC220	52	340*320*800	Plug directly into power

MANUAL JUICER EXTRACTOR



DQ-SD01



DQ-SD02



DQ-SD03



DQ-SD04



Model	N.W. (kg)	Dimension (mm)
DQ-SD01/02/03/04	3.2	170*210*400

JUICER & POTATO CHIPS CUTTER



DQ-DDST01

Model	DQ-DDST01
Voltage	110-240V
Power	40W
Frequency	50Hz
Speed	3000s/m
Product Capacity	150Kg/h
N.W.	11.5Kg
Dimensions	275*615*385mm



Model	N.W. (kg)	Dimension (mm)
DQ-SDST01	3.2	380*255*235



DQ-SDST01

FRESH ORANGE JUICER



Model	Power (kw)	Voltage (v)	Frequency (Hz)	Orange size (mm)	Output (mm)	Juicing rate (%)	N.W. (kg)	Dimension (mm)
XC-2000E-2	0.12	110/220	50/60	40-90	22-25	40-50	40	400*300*790

JUICE DISPENSER



Model	Cold power (kw)	Heat power (kw)	Voltage (v)	Frequency (Hz)	Cold-beverage temperature (°C)	Hot-beverage temperature (°C)	N.W. (kg)	Dimension (mm)
DQ-LSJ12LX3	0.32	1.2	220/240	50/60	7~12	52~58	33	600*410*660
DQ-LRSJ12LX3	0.32	1.2	220/240	50/60	7~12	52~58	36	600*410*660
DQ-LSP12LX3	0.32	1.2	110/115	50/60	7~12	52~58	36	600*410*660
DQ-LRSP12LX3	0.32	1.2	110/115	50/60	7~12	52~58	39	600*410*660